



ストレートアーム高所作業車



K-シリーズ昇降作業台
MOBILE ELEVATING WORK PLATFORM



XGS40ACK-Li



仕様

項目		単位	XGS40ACK-Li
サイズ			
Overall machine dimensions	a.Length (stowed)	mm	14025
	Length (transportation)	mm	12500
	b.Width (Shaft retracted/extended)	mm	2490/3800
	c.height	mm	3000
Working platform dimensions	Length	mm	2400
	Width	mm	900
	Height	mm	1150
d.wheelbase(retracted/extended)		mm	4020
Performance			
Max.working height		mm	40200
Max.platform height		mm	38200
Max.working range		mm	21900
Max.lift capacity		kg	300/460
Boom variable range		°	-6.5 ~ +75
Turntable rotation angle		°	360
Tail swing of turntable (retract/expand)		mm	2565/1910
Platform rotation angle		°	160
Jib vertical rotation – up		°	70
Jib vertical rotation – down		°	60
Total Weight		kg	19700
Driving speed (stowed)		km/h	5
Travel speed (ascent or extension)		km/h	0.5
Min.turning radius–outside(retract/expand)		m	5.8/6.8
Min.turning radius–inside(retract/expand)		m	2.4/4.4
Min.ground clearance		mm	300
Gradeability(counterweight end up)		% (°)	40(21.8)
Gradeability(counterweight end down)		% (°)	30(17)
Max.Lateral Travel Slope		% (°)	25(14)
Power source			
Tire specifications			445/50D710 Infused solid tire
Control			12V DC proportional control
Battery specification		V/Ah	76.8/608
Charger Specifications		V/Ah	80/80
Hydraulic oil tank capacity		L	260
Hydraulic system capacity		L	330

Work Curve Graph

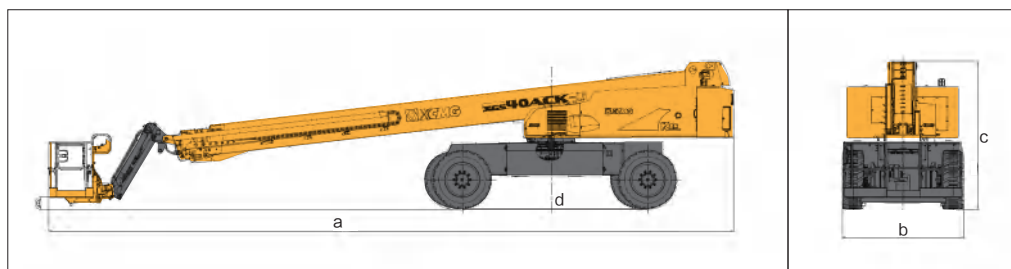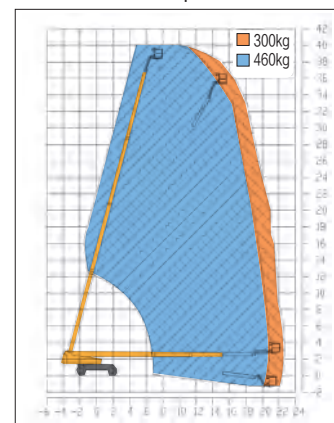

SOLID TO SUCCEED